
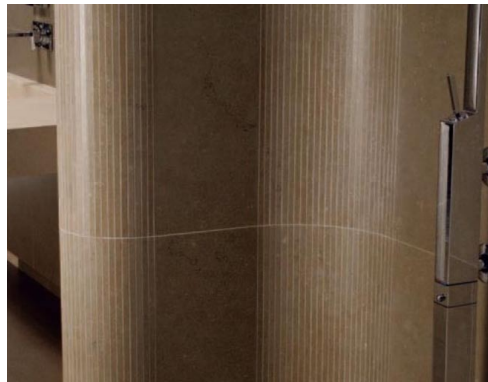


Kerlite Strips

General: Kerlite Strips has been obtained by cutting a sheet of Kerlite into strips 10 x 1000mm then bonded on a plastic mesh backing with a 1mm joint, to a size of 400 x 1000mm. It can be used as decorative special pieces, and to coat columns and other concave or convex surfaces. The applications for Kerlite – just keep on expanding throughout the building and other industries.

Applications: Commercial & residential in & out doors, including public facility areas, buildings, foyers, boutiques, galleries, living areas, kitchens and bathrooms, for all wall applications, splashbacks, lift cars and boats (inclusive of wall cladding)

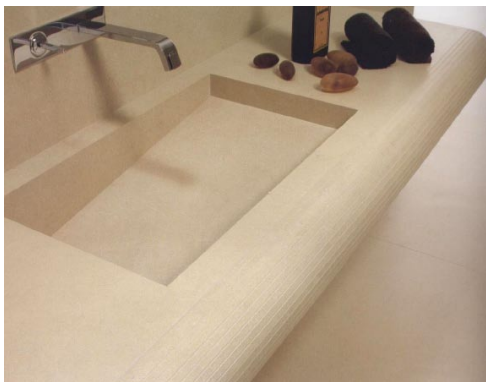

Origin:	Italy	
Colours:	Amande	(limestone beige)
	Caramel	(light caramel)
	Noisette	(almond husk)
	Cendre	(grey mottle rock)
	Perle	(pearl grey)
Sizes:	400 x 1000 mm	
Thickness:	3mm	
Finishes:	Smooth surface finish (in & outdoor walls)	
Type:	Full-bodied vitrified porcelain with rectified edges	
Appearance:	Soft natural stone shades with smooth surface feel	
Production:	Pure phosphate & clay with zirconium & colouring	
Technical:	Water Absorption less than 0.01% Frost Resistant (No visible fault) & Scratch Resistant Stain Resistant (Class 5) & Graffiti Proof Surface Hardness – MOHS 7 (of 10) Grade (PEI) 5 – All Residential, All Commercial Fire Retardant – Rating “Class 0” Weight – 7.1 kg m ²	
Slip Resistance:	R9 (DIN 51130)	
Guarantee:	20 Years - for residential & commercial applications	