


Shellstone

General: Shellstone is designed to create the natural ambience of weathered stone, with all the benefits and technical superiority of porcelain. The high grade specifications and slip resistance, exposed to great wear & tear. The multi format sizes allow various combinations of design to be achieved in the laying of external floor areas. The series also has Inserto- which is engraved patterns for added feature to your design.

Applications: Commercial & residential out doors, including public areas, pedestrian walkways, patios, courtyards and pool surrounds.

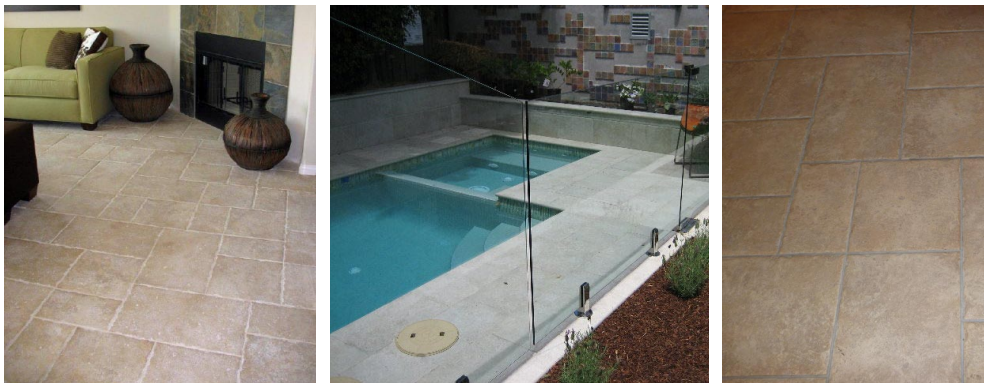

Origin:	Spain		
Colours:	Beige (BG)	(Beige tones)	
	Gris (GR)	(Light Grey)	
	Marron (MN)	(Mocca Brown)	
Sizes:	333 x 539 mm	539 x 539 mm	
Multi Format Box:	201 x 333 mm	333 x 333 mm	333 x 539mm
Inserto:	339 x 539 mm	539 x 539 mm	
Thickness:	11mm		
Finishes:	Structured finish (indoors & outdoors)		
Type:	Fully vitrified, rustic glazing		
Appearance:	Natural tones with pitted surface variation		
Production:	Double-pressed, natural edges		
Technical:	Water Absorption less than 0.05%		
	Frost Resistant		
	Scratch Resistant		
	Surface Hardness – MOHS 8 (of 10)		
	Stain Resistant (hot running water)		
	Chemical Resistant		
Installation:	For best results using the Multi Format pattern, leave a 5mm grout joint when installing this material.		
Slip Resistance:	Australian Standard AS/NZS 4586-2004		

- **Average Coefficient of Friction by Dry Floor Test - 0.85**
- **Classification of Floor Surface in Dry Condition - F**
- **Contribution to the risk of slipping when dry - Moderate to Very Low**
- **Average Pendulum Number achieved by Wet Test - 61**
- **Classification of Floor Surface in Wet Condition - V**
- **Risk of Slipping when Floor Surface is Wet - Very Low**